

EVC-3MB12GAF

3메가 글로벌 셔터 실외형 볼렛 카메라 / 저조도센서

IP PoE / H.264 / MJPEG

GLOBAL
3M IP




SONY Global Shutter



FEATURES

- 1/1.8 inch Sony Global shutter CMOS 적용
- 3Mega 30fps / 2Mega 60fps
- 적외선 8IR
- PoE 지원(IEEE802.3af)
- Onvif Profile S 호환
- H.264, MJPEG
- 트리플 스트리밍 지원
- 다양한 기능 지원
- 렌즈보정, 역광보정기능, 안개보정기능,
- 2DNR/3DNR 움직임 감지,
- 사생활 보호 등의 기능 지원
- 뛰어난 호환성
- 방진/방수 인증 : IP66
- 충격 인증 : IK10
- AF 12~40mm 렌즈

DIMENSION (UNIT:mm)

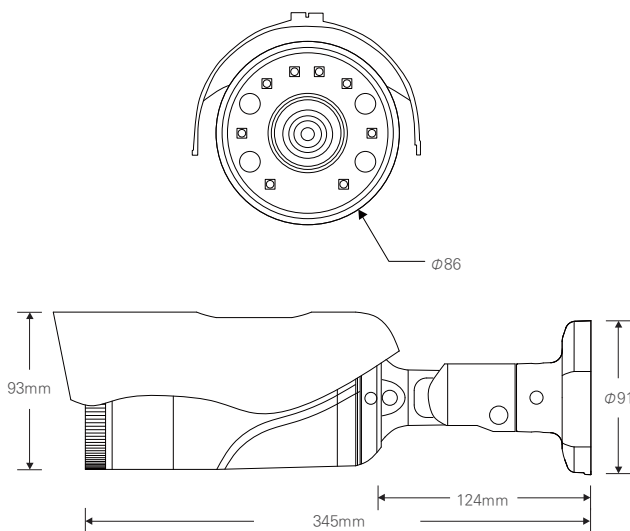

SPECIFICATION

-이미지	
촬영소자	1/1.8" SONY Exmor Global Shutter 3.21Mega Pixels Image Sensor
주사방식	Progressive Scan
최대화소	2064(H) x 1554(V), 3.21 Mega Pixels
유효화소	2064(H)x 1544(V), 3.19 Mega Pixels
-기능	
주/야간모드	Auto / Day(Color) / Night(BW), ICR Control
사생활보호영역	8 Programmable Zones, On / Off
움직임감지	432 Zone, Sensitivity 1 ~ 5 Step, On/Off
WDR	Real WDR On(Adjust) / Off
DNR	2DNR, 3DNR, On(Adjust) / Off
안개보정	Detects Foggy, On(Adjust) / Off
SLDC	Simple Lens Distortion Correction, On(Adjust) / Off
디지털 셔터(움선)	Auto(1/30~1/30000), Suppress Rolling, Manual
컬러조정	Bright / Contrast / Saturation / Sharp / Hue
화이트밸런스	Auto / Push / User
OSD표시	Text, Date, Time, Event, On / Off
좌우반전	Normal / mirror(H) / Flip(V) / Both(HV)
-네트워크	
인터페이스	RJ45 10/100 Base-T PoE
프로토콜	TCP/IP, UDP/IP, RTP, RTSP, RTCP, NTP, HTTP, DHCP, FTP, SMTP, DNS, DDNS
Onvif	Ver19.12
동시접속	Max. 10 user
압축방식	H.264 / MJPEG
해상도	2048x1536/1600x1200/1920x1080/1280x1024 / 1280x960/1280x720/1024x768/640x480/320x240
프레임	3Mega Max. 30fps 2Mega Max. 60fps
비디오 품질	H.265 : Birtate Control H.264 : Bitrate Control MJPEG : Quality Level Control
비디오스트리밍	Tripl Stream (Stream1,2,3) RTP/RTSP, UnicastRTP, Multicast RTP
오디오스트리밍	G.711 u-law/Two way
센서인	1 (NC / NO)
알람아웃	1 (Digital Outut, Open Collector)
웹브라우저OS	Windows 7, 8, 10,
웹브라우저매니저	IE 11이상, Firefox, Safari, Opera
웹뷰어	IE only (Active-X)